
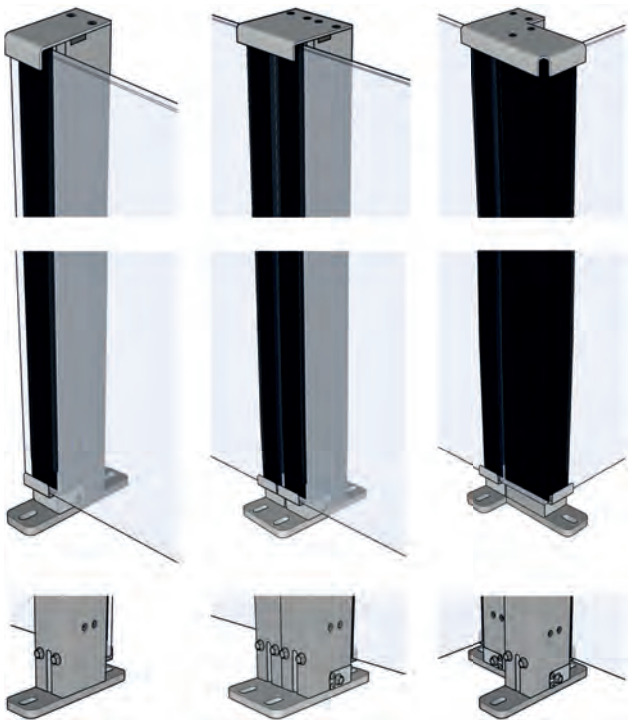


# CiU® BalconyFixed

**Product type** Glass balustrade  
**Location** Balcony

**ErgoSafe®**  
FLEXIBLE GLASS SOLUTIONS

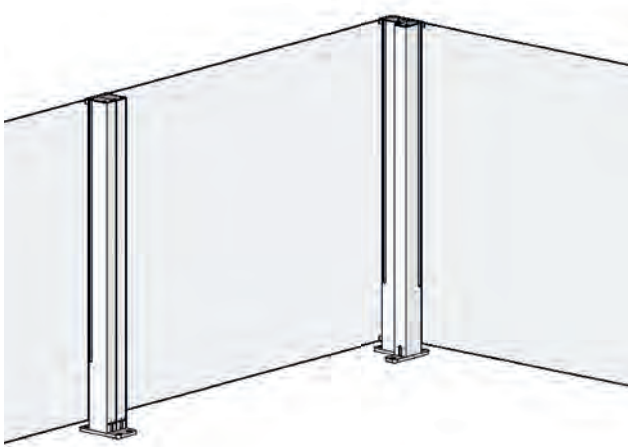

## Description

Glass balustrade

## Safety

ClickitUp® is tested according to EN 12600:2002

## Manufacturing method

Structural glazing is used to fit the glass to the aluminium posts

## Baseplate mounts

Baseplate mounts are available as single, double and corner variants.

## Cover caps

Cover caps are available as single, double and corner variants.

## Material

Glass, aluminium and stainless steel

## Glass

Toughened laminate glass 8.76 mm

## Height

1100 mm/1200 mm

## Width measurement straight section

Max 1800 mm



## Surface treatment

Natural anodised as standard. As an option and at an additional charge black anodised or powder coated finish in a RAL colour are available.

## Installation

During installation the sections are linked together into a single system with the help of double cover caps and double baseplate mounts

# CiU BalconyFixed

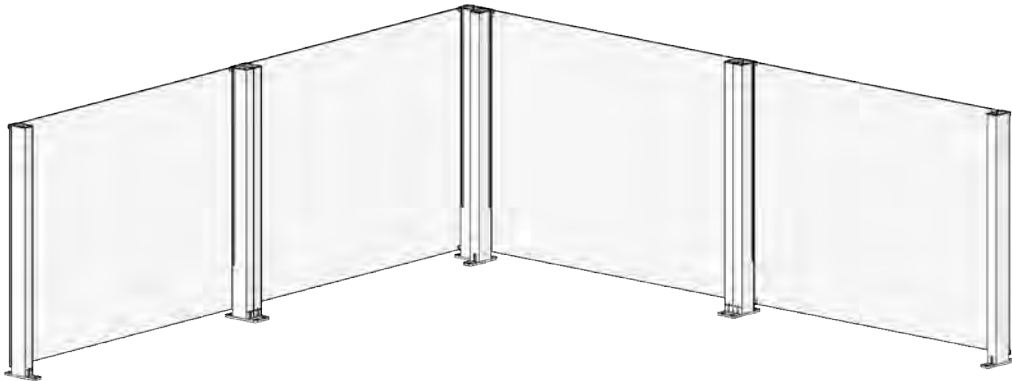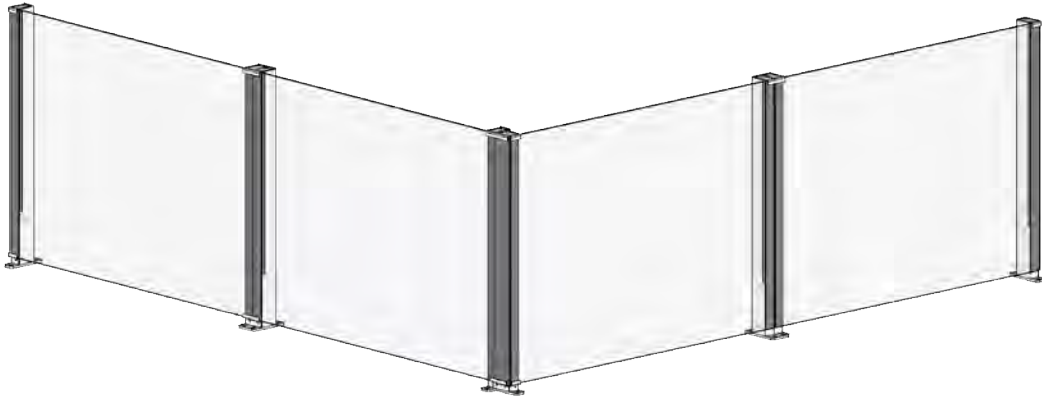

ClickitUp<sup>®</sup>  
by ErgoSafe<sup>®</sup>