

CiU® Fixed/Door

Product type Door
Product family ClickitUp®

Description

Glass balustrade with door function

Safety

The balustrade must not be installed where there is a outcome risk.

Manufacturing method

Structural glazing is used to fit the glass to the aluminium posts

Baseplate mounts

Baseplate mounts are available as single, double and side baseplate mounts

Cover caps

Cover caps are available as single, double and corner variants

Material

Glass, aluminium and stainless steel

Glass fixed section

Toughened glass 8 mm

Height lowered balustrade


1100 mm or 1200 mm

Width measurement door section

Max measurement 1100 mm. For more door measurements contact your seller

Surface treatment

Natural anodised as standard. As an option at an additional charge, black anodised or powder coated in a RAL colour

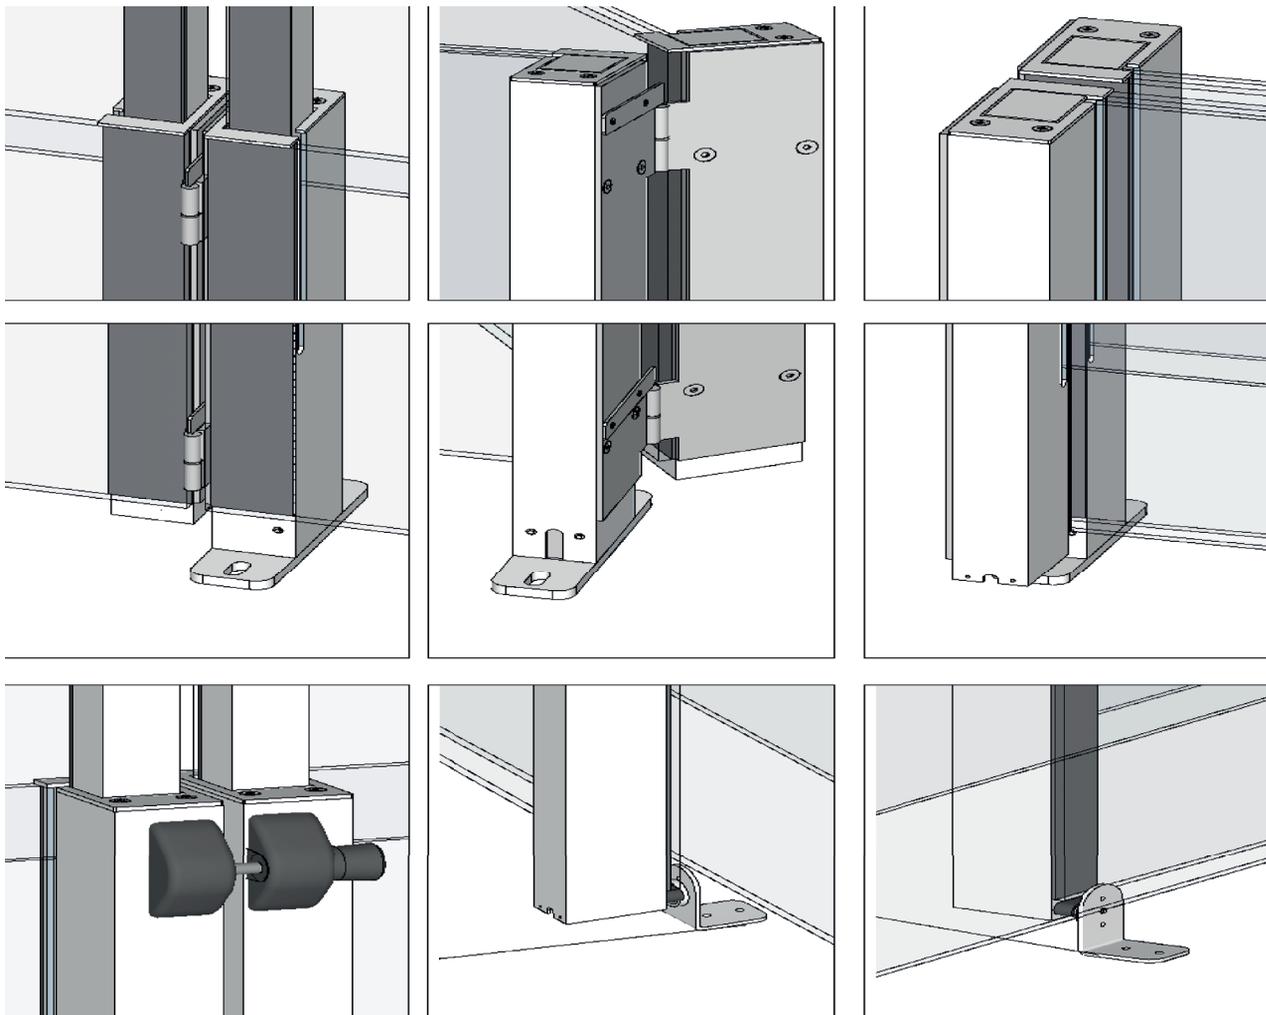

CiU® Fixed/Door

