

ClickitUp Free Standing

Product type Adjustable glass balustrade
Placement GROUND LEVEL

ErgoSafe[®]
FLEXIBLE GLASS SOLUTIONS



Description

Adjustable glass balustrade with planter or bench

Installation

Adjustable skids alternatively wheels

Safety

Safety Glass. CE marked according to the Machinery Directive 2006/42/ec

Drive Mechanism

The system have a semi-automatic gas spring technology that raises the movable section

Production method

Structural glazing is used to mount the glass onto aluminium poles

Ground mounts

Free Standing

Covers

Single

Material

Glass, aluminium, stainless steel and galvanized steel

Glass fixed

8 mm tempered glass

Glass movable

6 mm tempered glass

Height

1100 mm (1152-1202 with feet)

Height when raised

1900 mm

Width

1000 mm, 1500 mm, and 1800 mm as standard. Custom size maximum width 2000 mm

Surface treatment


ClickitUp: natural or black anodised.

Box: (planter or bench) black power coated in RAL 9005

Energy & Sound value

A mounted glass balustrade from ErgoSafe has an insulating and sound-reducing effect

ClickitUp Free Standing

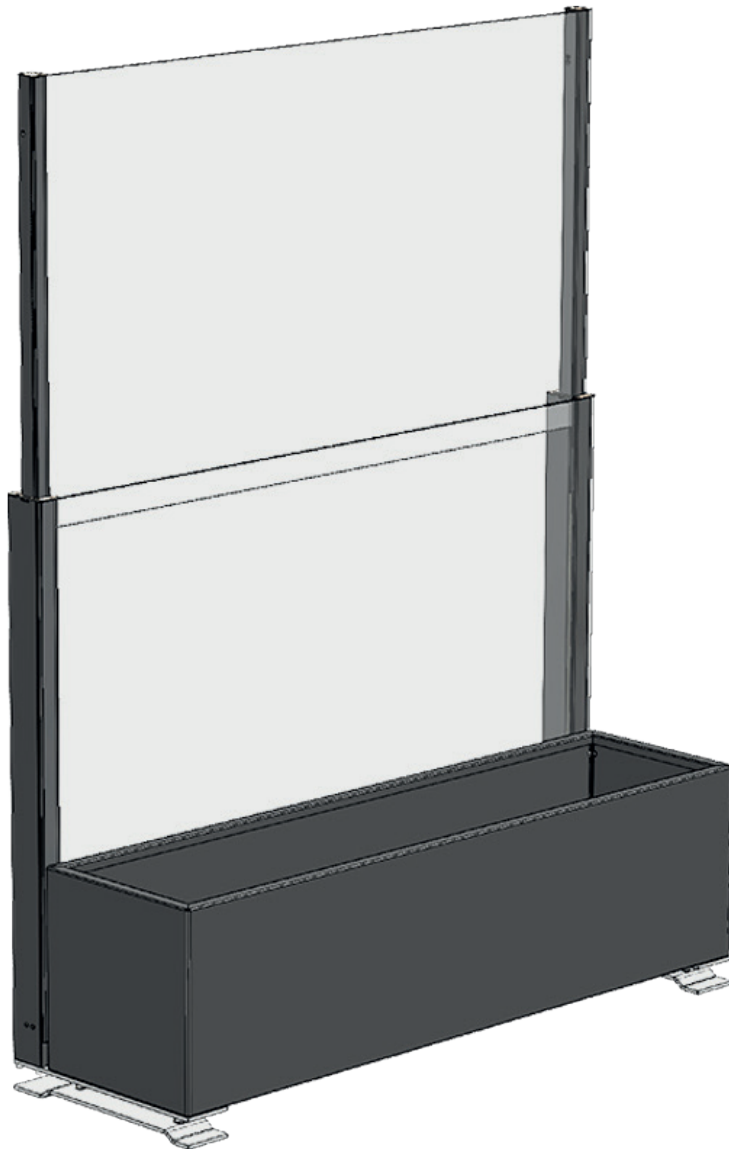

ClickitUp[®]
by ErgoSafe[™]