

CiU BalconyFlex

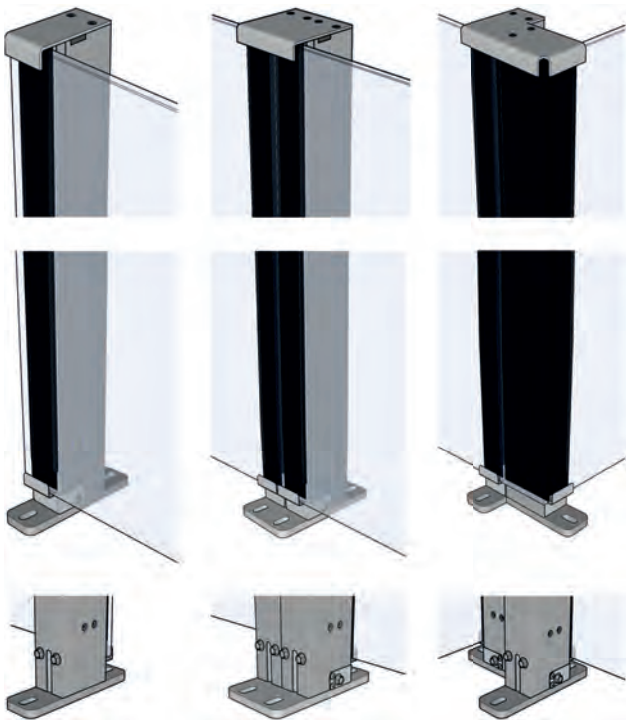
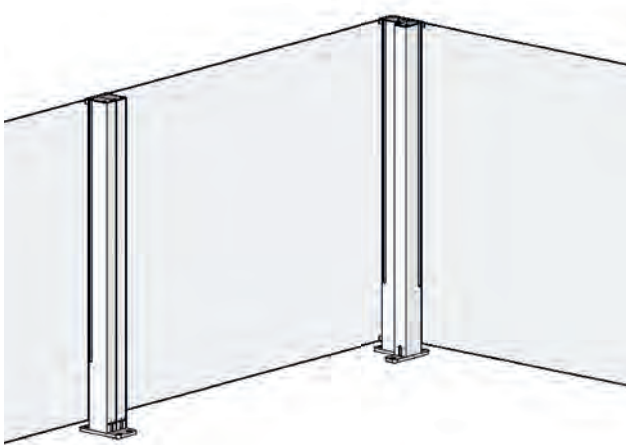
Product type

Glass balustrade

Location

Balcony

ErgoSafe®
FLEXIBLE GLASS SOLUTIONS

**Description**

Glass balustrades with the possibility to upgrade to ClickitUpBalcony which has an upper movable part

Safety

The glass is designed to be user-safe. Tested according to EN12600:2002 heavy shock. With upgrade: See ClickitUpBalcony. May be installed where there is a risk of falling

Manufacturing method

Structural glazing is used to fit the glass to the aluminium posts

Baseplate mounts

Baseplate mounts are available as single, double and corner variants.

Cover caps

Cover caps are available as single, double and corner variants.

Material

Glass, aluminium and stainless steel

Glass

Toughened laminate glass 8.76 mm

Height

1100 mm with upgrade: see ClickitUpBalcony

Width measurement straight section

Max 1800 mm

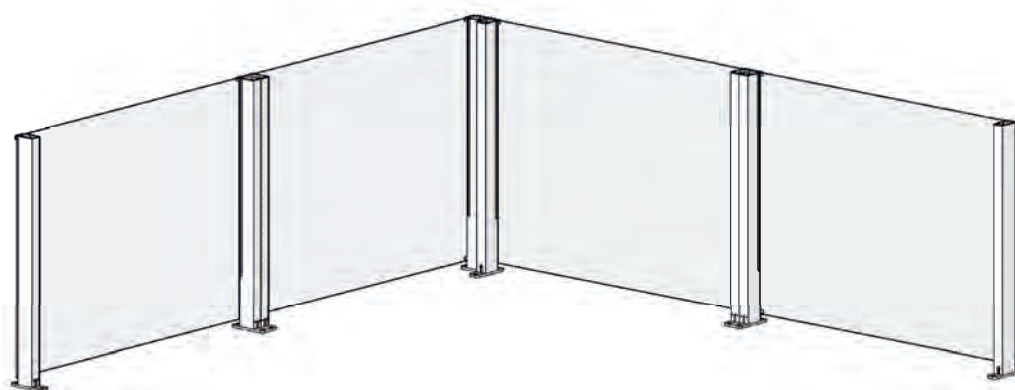
Surface treatment

Natural anodised as standard. As an option and at an additional charge black anodised or powder coated finish in a RAL colour are available.

Installation

During installation the sections are linked together into a single system with the help of double cover caps and double baseplate mounts

CiU BalconyFlex



ClickitUp[®]
by ErgoSafe