
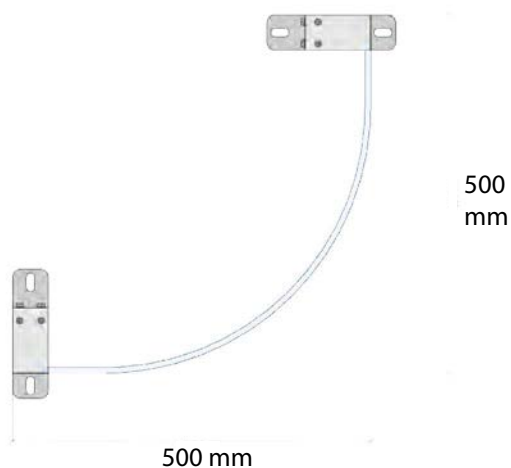


ClickitUp® Curved

Product type Height adjustable glass balustrade
Product family ClickitUp®

ErgoSafe®
FLEXIBLE GLASS SOLUTIONS

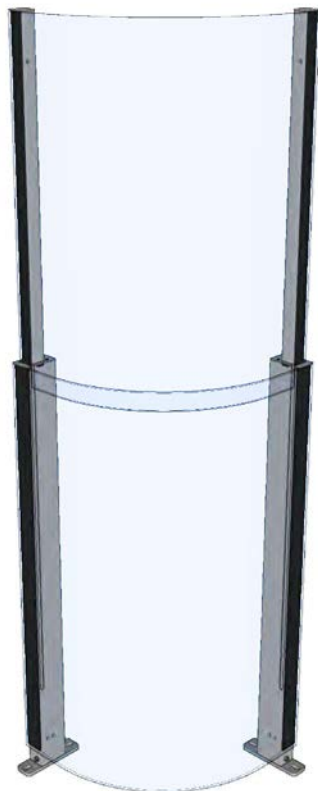

Description

Height adjustable glass balustrade

Safety

ClickitUp® is CE marked according to the machinery directive 2006/42/EC. The balustrade must not be installed where there is a risk of falling.

Manufacturing method

Structural glazing is used to fit the glass to the aluminium posts UV bonding to create 90-degree angles of glass.

Drive mechanism

The system employs semi-automatic gas strut technology that raises the movable section

Baseplate mounts

Baseplate mounts are available as single, double and corner variants as well as side baseplate mounts

Cover caps

Cover caps are available as single, double and corner variants

Material

Glass, aluminium and stainless steel

Glass fixed section/Glass movable section

Toughened glass 8 mm/Toughened glass 6 mm

Height lowered balustrade/ Height raised position

1100 mm/1900 mm

Width measurement

500x500 mm

Surface treatment

Natural anodised as standard. As an option at an additional charge, black anodised or powder coated in a RAL colour

Sound value

An installed ClickitUp® in the raised position has a sound dampening effect

Assembly

ClickitUp® sections are delivered ready-assembled. Sections are linked together during installation to form a system with the help of double cover caps and double baseplate mounts.

ClickitUpCurved



ClickitUp[®]
by ErgoSafe[®]