

CiUWindscreen






ClickitUp[®]
by ErgoSafe[®]

CiUWindscreen

Category Windscreen
Product CiUWindscreen

ErgoSafe®

FLEXIBLE GLASS SOLUTIONS

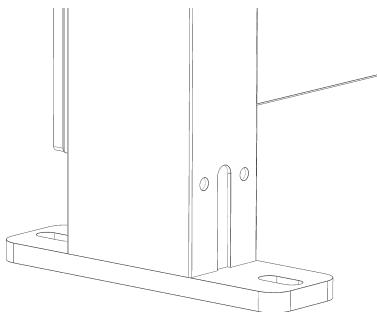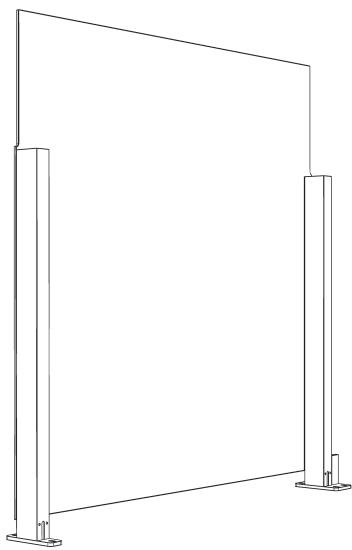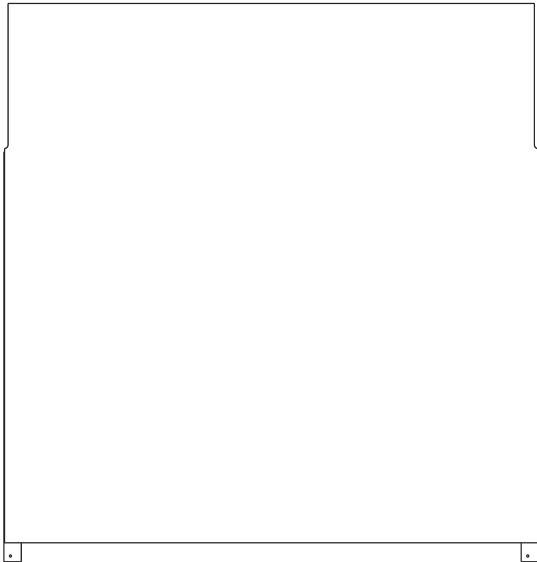

Description

Tall glass balustrade providing effective wind protection while maintaining the view

Placement

Must not be installed where there is a risk of falling

Safety

The glass is safety glass

Manufacturing method

Structural glazing is used for bonding glass to aluminium posts

Fastening

Fastening to floor using selected baseplate mounts

Material

Glass, aluminium and stainless steel

Glass

8 mm toughened safety glass

Standard height

1500 mm (excluding baseplate mounts)

Special height

Available on request

Width

350 - 2000 mm

Depth

91 mm (excluding baseplate mounts)

Surface treatment

Posts and baseplate mounts are supplied in natural anodised finish as standard. Black anodised finish or powder coating in any RAL colour is available upon request at an additional cost.