

ClickitUp® by ErgoSafe®

CLEAR AS GLASS

ClickitUp® glass balustrades has been developed with the intention of combining design, quality, safety and function. The stylish silhouette of the glazing bar is the result of a combination of glass, aluminium and a structural glazing bonding technique - which means that the glass is bonded directly to the aluminium profiles. This combination creates the minimalist expression of the glass balustrade with the transparency of the glass in focus. Launched in 2014, ClickitUp® is the original free-edge height-adjustable glass balustrade. ClickitUp® - delivers an almost crystal clear view.

SWEDISH & SUSTAINABLE


ErgoSafe are a Swedish company with our own factory in Halmstad where all our production and development takes place. This guarantees a glass balustrade of the highest quality that is manufactured by our own highly trained staff. We work in modern, well-equipped premises and in a working environment of the highest quality. Here we produce sustainable products made of fully recyclable materials with the utmost respect for our natural resources. Our ambition is to do things better, more efficiently and to have sustainability running through our everyday decision-making. For us, sustainability is a journey towards constantly becoming more resource efficient and making better and more environmentally friendly choices. We take responsibility for the environment and humankind.

QUALITY & SAFETY

As the forward-thinking company we are, quality and safety are constantly on our agenda. We have several different product groups that place high demands on us as a supplier. Requirements that we see as self-evident to relate to and comply with in our daily lives. This requires constant testing and verification of our products. The legal requirements and tests required depend on the products being sold and where they are going to be installed.

Welcome to **www.clickitup.com** for more information about ErgoSafe and our work on sustainability, quality and safety.

ErgoSafe's ClickitUp® branded glass balustrades are design-protected by: design right 002416248. 001-005. 3/3 2014. Our design protection means that no other operator has the legal right to manufacture, sell or import copies of ErgoSafe's glass balustrades within the EU.

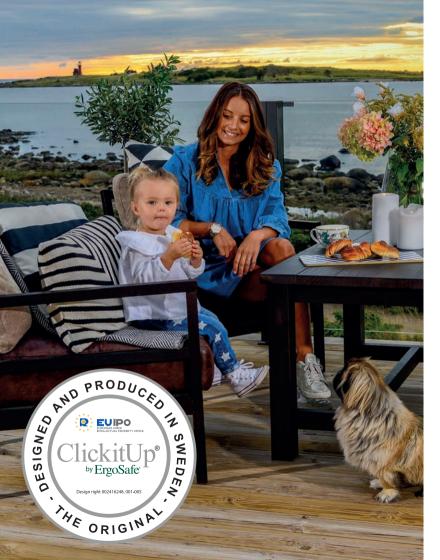

Glass balustrades for all outdoor environments!


We always want to deliver the best solution with **our glass balustrades** for the users patio, terrace, balcony or outdoor dining area. To match this, we have developed several unique variants of glass balustrade.

For protection from the wind, without compromising the view, there are our height-adjustable glass balustrades - **ClickitUp** and **ClickitUpInside.** In the same elegant and stylish design, we also have glass balustrades with only one fixed lower glass section, **CiUFixed.**

CiUFlex is available in versions for both ground level and balcony and is based on the original **ClickitUp®** design. How this differs from the original version is that it is now possible to order fixed and movable sections at different times. Both CiUFlex and CiUBalconyFlex can easily and smoothly be upgraded with the height-adjustable and movable sections that the glass balustrades have.

We deliver our glass balustrades in complete sections and it is possible to combine our glass balustrades with each other if the location and needs require it.

More information about our various types of glass balustrades can be found at the end of this brochure or on our website **www.clickitup.com**

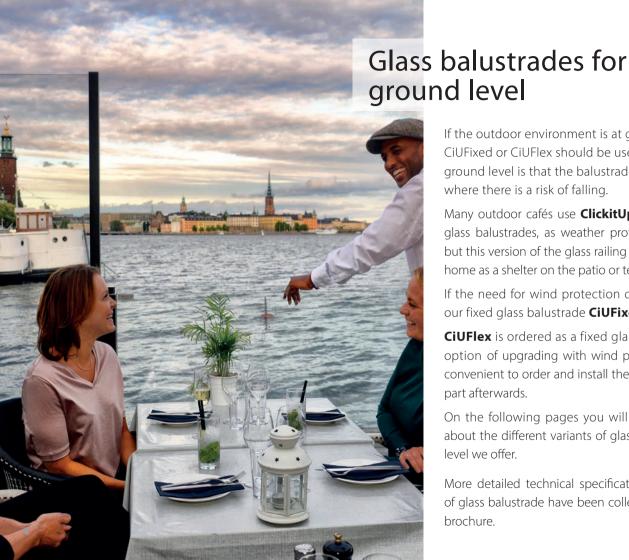

If the outdoor environment is at ground level, ClickitUp, CiUFixed or CiUFlex should be used. The requirement of ground level is that the balustrade must not be installed where there is a risk of falling.

Many outdoor cafés use **ClickitUp**, our height-adjustable glass balustrades, as weather protection for their guests, but this version of the glass railing is just as suitable for the home as a shelter on the patio or terrace.

If the need for wind protection does not exist, we have our fixed glass balustrade CiUFixed.

CiUFlex is ordered as a fixed glass balustrade with the option of upgrading with wind protection. It is easy and convenient to order and install the separate upper moving part afterwards.

On the following pages you will find more information about the different variants of glass balustrade for ground level we offer.

More detailed technical specifications for all the variants of glass balustrade have been collected at the back of this brochure.



ClickitUp

- √ Height adjustable glass balustrade
- √ The original
- Extending the outdoor season

ClickitUp is the original glass balustrade with a free glass edge and with the ability to be raised and lowered. The glass balustrade has an elegant and stylish design.

ClickitUp creates the conditions for a windless, stylish oasis on the terrace, patio or outdoor terrace. This type of balustrade should be chosen for ground level outdoor environments where there is a need for wind protection.

The glass balustrade is available in the following sections: straight, door and curved corner, **ClickitUpCurved**. The straight sections can be ordered in standard or custom sizes. The maximum width dimension is 2000 mm. The glass balustrade is available in two different heights.

ClickitUpDoor is a glass balustrade with a door. Doors are available both as standard and special. When closed, the door has the appearance of a straight section.



CiUFixed

- √ Elegant appearance
- ✓ Combine with ClickitUp
- ✓ Easy to assemble

CiUFixed is our fixed glass balustrade for outdoor environments at ground level. CiUFixed is the version of the glass balustrade without the windscreen, unlike the ClickitUp range. The two variants can be combined perfectly.

When the focus is on both construction and design, this is the glass balustrade for you. It should be highlighted that this glass balustrade is very easy to install.

CiUFixed is available in a straight section, door and as in a curved corner, **CiUFixedCurved**. The straight sections can be ordered in standard or custom sizes. The maximum width dimension is 2000 mm. The glass balustrade is available in two heights: 1100 mm or 1200 mm.

CiUFixedDoor is a glass balustrade with a door. The door is available in widths of 1000 mm and 1100 mm. When closed, the door has the appearance of a straight section.



CiUFlex

- √ Easy to upgrade
- ✓ Innovative construction
- ✓ Sleek and stylish design

CiUFlex is designed to allow the section to be upgraded with an upper movable glass. The CiUFlex product is designed for outdoor environments at ground level.

The design makes it possible to order fixed and movable sections at different times. Retrofitting is simple and easy to do, and when the installation is complete, CiUFlex has the same finish and appearance as ClickitUp.

CiUFlex is available in a straight section and door. The straight sections can be ordered in standard or custom sizes. The maximum width dimension is 2000 mm. The balustrade is available in two heights.

CiUFlexDoor is a glass balustrade that function as a door.

Patent 20158013.1



Glass railing for the balcony

When the outdoor environment is located where there is a risk of falling we have glass balustrades with balcony glass. Our range of glass balcony balustrades are tested and approved according to current industry standards. The range meets the toughest test requirements on the market without compromising on design. Our glass balustrade for the balcony provides design and security all in one.

ClickitUpBalcony for the terrace provides a crystal-clear view while the upper movable section protects from the wind. The balustrades can be combined with our fixed glass balustrade **CiUBalconyFixed**, which has the same elegant and stylish design as our height-adjustable version.

CiUBalconyFlex is a fixed glass balustrade that can subsequently be upgraded with an upper movable section.

The following pages present our different balcony variants.



ClickitUpBalcony

- √ Height adjustable function
- ✓ A safe product
- √ Function and design all in one


ClickitUpBalcony creates the opportunity for a breezy oasis on the balcony or terrace while the glass railing provides a stylish and attractive facade. Perfect for the roof terrace

We deliver our glass balustrades in complete sections and it is possible to combine our glass balustrades with each other if the location and needs require it.

Our height-adjustable glass balustrade for terraces and balconies is suitable for installation where there is a risk of falling.

ClickitUpBalcony is available as a straight section and as a curved corner, **ClickitUpBalconyCurved**.

The straight sections can be ordered in standard or custom sizes. The maximum width measurement is 1800 mm. The balustrade is available in two different heights.

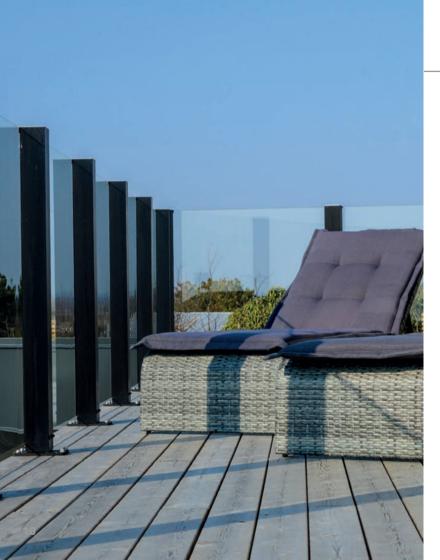

CiUBalconyFixed

- √ Can be combined
- ✓ Approved for risk of falling
- ✓ Safety and design all in one

CiUBalconyFixed is our fixed glass balustrade for terraces and balconies and is adapted for installation where there is a risk of falling Perfectly combined with CIUBalconyFixed.

This variant of glass balustrade can be perfectly combined with ClickitUpBalcony or with our other variants of glass balustrade.

CiUBalconyFixed is a stylish premium glass balustrade with the same finish, design and safety concept as ClickitUp-Balcony.

CiUBalconyFixed is available as a straight section and curved corner, **CiUBalconyFixedCurved**.

The straight sections can be ordered in standard or custom sizes. The maximum width measurement is 1800 mm. The glass balustrade comes in two heights: 1100 mm or 1200 mm.



CiUBalconyFlex

- √ Easy to upgrade
- ✓ Unique design and construction
- ✓ Innovative function

CiUBalconyFlex glass balustrade has the same construction as CiUFlex but is adapted for installations that require balcony glass.

This version of the balustrade can easily and conveniently be upgraded with a movable section, which makes it possible to retrofit the wind break that our balustrades with the height-adjustable function have.

The ability to retrofit the balustrade opens up for new opportunities. For example, it is possible to order fixed and movable sections at different times from different clients but for the same construction project.

CiUBalconyFlex is available as a straight section and can be ordered in both standard and custom dimensions. The maximum width is 1800 mm and it is available in two different heights.



Glass balustrade for retrofitting

ClickitUpInside is a glass balustrade that makes it possible to retrofit a glass windshield inside an existing balcony balustrade. If the outdoor environment already has an approved balustrade, ClickitUpInside is the option to choose

Retrofitting a height-adjustable glazing allows for a balcony in the open. Our inside versions are mounted inside other fixed installations.

There are two different versions, **ClickitUpInside 600** and **ClickitUpInside 1100**. It is the fixed lower glass that distinguishes the variants and which version fits best depends on which balustrade is already installed. The variants have ground mounts that are adapted so that it is possible to get close to an existing balustrade.

On the next page there is more information about our balustrade for mounting on the inside of an existing balustrade. We have collected technical specifications for all available versions at the back of this brochure.



ClickitUpInside 600/1100

- √ Height adjustable glass balustrade
- ✓ Available in two versions
- ✓ Placed inside the existing balustrade

ClickitUpInside 600 is a version of our glass balustrade that makes it possible to retrofit a glass windbreak inside the existing balcony. This version can be installed where an existing full-covering balustrade already exists.

ClickitUpInside 600 is ordered in custom dimensions with a maximum width of 1500 mm. When lowered the balustrade is 1100 mm and raised it is 1900 mm.

ClickitUpInside 1100 has largely the same construction as ClickitUp. What differentiates the products is that they have different ground mounts. For our Inside versions, we have created ground brackets that can be placed close to an existing balustrade or wall.

ClickitUpInside 1100 can be ordered both as standard and custom with a maximum width of 2000 mm and in two different heights.

Location	GROUND LEVEL					
Product Name	ClickitUp	CiUFixed	CiUFlex			
Description	Adjustable glass balustrade	Glass balustrade	Glass balustrades with the possibility to upgrade to ClickitUp which has an upper movable part			
Products	Straight section, door, curved		Straight section, door			
Safety	Safty Glass. CE marked according to the Machinery Directive 2006/42/ec	Safty Glass.	Safty Glass With upgrade: See ClickitUp			
Installation	The balustrade must not be installed where there is a risk of falling.					
Drive Mechanism	The system have a semi-automatic gas spring technology that raises the extendable section	No	With upgrade: See ClickitUp			
Production method	Structural glazing is used to mount the glass onto aluminium poles					
Ground mounts	Standard, angled					
Covers	Single, double, offset corner					
Material	Glass, aluminium and stainless steel					
Glass fixed	8 mm tempered glass					
Glass movable	6 mm tempered glass	-	With upgrade: See ClickitUp			
Height	1100/1200 mm	1100/1200 mm	1100/1200 mm			
Height when raised	1900/2000 mm	-	With upgrade: See ClickitUp			
Max width	2000 mm					
Surface treatment	Natural anodising as standard. Optional black anodising or powder-coating from the RAL colour chart (fixed posts only)					
Standard measurements	Standard section size: 100 mm intervals between 1000 mm and 2000 mm					
Energy & Sound value	A mounted glass railing from ErgoSafe has an insulating and sound-reducing effect					

	BALCONY	INSIDE THE BALUSTRADE				
ClickitUpBalcony	CiUBalconyFixed	CiUBalconyFlex	ClickitUpInside 600	ClickitUpInside 1100		
Adjustable glass balustrade Glass balustrade		Glass balustrades with the possibility to upgrade to ClickitUp which has an upper movable part	Adjustable glass balustrade with a lower glass that is 600 mm high	Adjustable glass balustrade		
Straight section, cur	ved corner	Straight section				
Safty Glass. Tested according to EN 12600:2002 Impact test. CE marked according to the Machinery Directive 2006/42/EC.	Safty Glass. Tested according to EN 12600:2002 Impact test.	Safty Glass. Tested according to EN 12600:2002 Impact test. With upgrade: See ClickitUpBalcony	Safty glass. CE marked according to the Machinery Directive 2006/42/EC.			
May be i	nstalled where there is a ris	k of falling.	The balustrade must not be installed where there is a risk of falling.			
The system have a semi-automa- tic gas spring technology that raises the extendable section	No	With upgrade: See ClickitUpBalcony	The system employs a semi-automatic gas spring technology that raises the extendable section			
Structural glazing is used to mount the glass onto aluminium poles						
Standard			Inside			
Single, double, offset corner						
Glass, aluminium and stainless steel						
8.76 mm tempered laminated glass			8 mm tempered glass			
6 mm tempered glass	-	-	6 mm tempered glass			
1100/1200 mm	1100/1200 mm	1100/1200 mm	1100 mm	1100/1200 mm		
1900/2000 mm	-	With upgrade: See ClickitUpBalcony	1900 mm	1900/2000 mm		
1800 mm			1500 mm	2000 mm		
Natural anodising as standard. Optional black anodising or powder-coating from the RAL colour chart (fixed posts only)						
Standard section size:	100 mm intervals between	Not standard, always or- dered made to measure	Std. dimensions 100 mm intervals between 1000 mm and 2000 mm			
A mounted glass railing from ErgoSafe has an insulating and sound-reducing effect						







